

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 23 TOWNSHIP 15 RANGE 4

DATE: 9-24-01 8-17-06

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison

METHOD OF ESTABLISHMENT: County: 9-8-99


IN. S.P.C. E ZONE NAD '83

NAME: 15042302

N: 498632.1100(m)

E: 66776.6200(m)

Raymond St. 2200 S

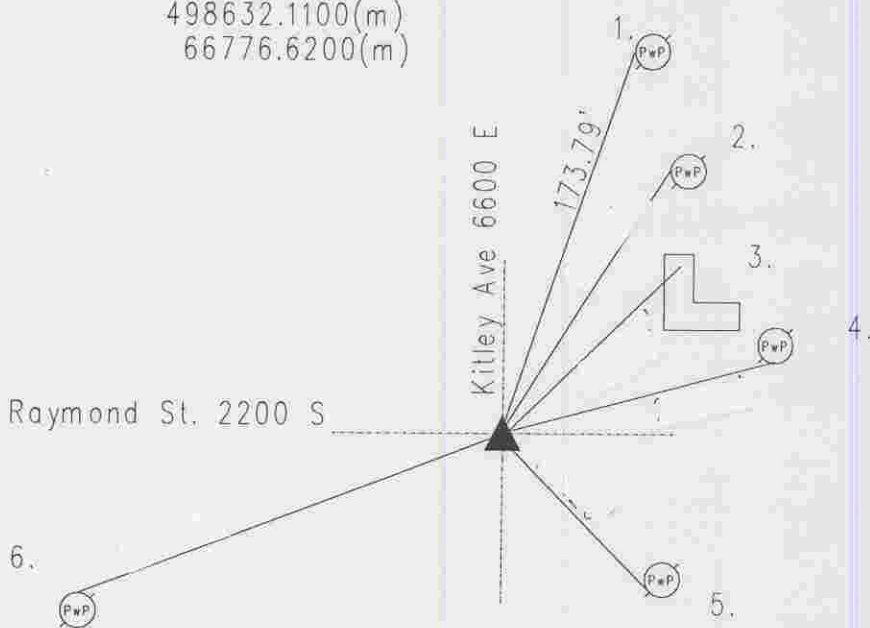

Corner originally set as a post in 1820 by John with the following witnesses: 22" beech bearing north 70 degrees, thence east 40 links; and a 20" dogwood bearing south 74 degrees, thence west 29 links. (MC Atlas 10.) A survey by H.W. Klausermann on May 8th, 1903 indicates a stone set with the following witnesses: 18" apple bearing south 41 degrees, thence east 42.10 feet; and a 14" locust bearing north 20.50 degrees, thence west 92.50 feet. (Warren Legal Book p.22) Corner referenced by MCS on 9/16/46 and called stone down 1". Corner referenced by Monroe on 12/16/59 and called a p.k nail with brass washer over stone. Corner referenced by Wilcoxon on 10/9/75 and called a date nail. Corner referenced by Greene on 8/10/88 and called a p.k nail. Corner referenced by Kiste on 10/19/95 and called a p.k nail. Corner referenced by Kiste on 9/8/99 and called a p.k nail. Corner excavated on 9/20/01 by Wilcoxon and a nail with brass washer was found 7" down. A stone was found under the nail with the brass washer 15" down. A # 205 cast iron Harrison monument was set in position of the stone.

15042302

REF.	DISTANCE	DESCRIPTION
1.	173.79'	PK nail W PwP#64-617 A 15"up
2.	73.59'	PK nail W PwP#1-617A 24"up
3.	24.14'	Cut 'x' in concrete headwall
4.	26.24'	PK nail S pwP no# 6"up
5.	28.41'	PK nail SW PwP#129-617 B 36"up
6.	86.19'	PK nail N PwP#1821-BT 616 12"up